





HSF RoHS

SPECIFICATIONS PERFORMANCE

Electical Rating: AC/DC 50V 0.5A
 Insulation Resistance: 500MΩ
 Withstang Volt: 200V AC/minute
 Opratng Temperature: -40°C to +105°C
 Material
 Contact: Phosphor Bronze Gold-Plated
 Housing: LCP/PA46
 Max.Processing Temp: 260°C±5°C 5S

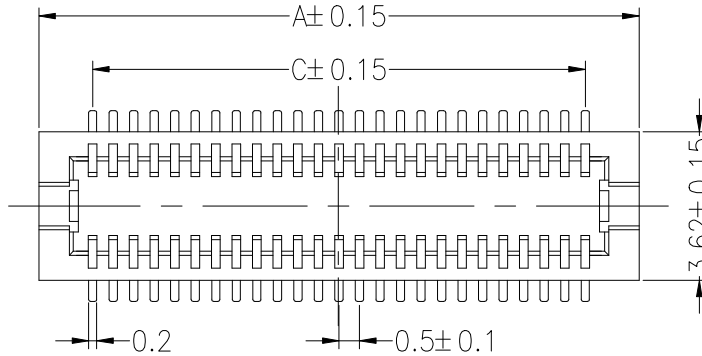

NO.OF Contacts	Dimensions		
	A	B	C
20P	7.10	5.64	4.50
30P	9.62	8.14	7.00
32P	10.12	8.64	7.50
36P	11.12	9.64	8.50
40P	12.12	10.64	9.50
50P	14.62	13.14	12.00
60P	17.12	15.64	14.50
80P	22.12	20.64	19.50
100P	27.12	25.64	24.50

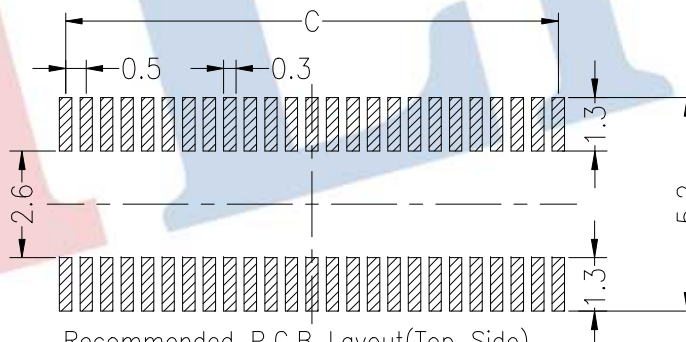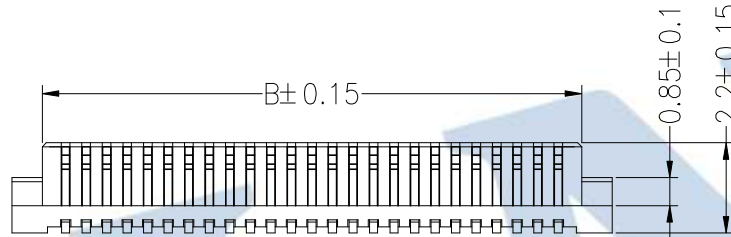

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

Ordering Information

3720 M XXX 022 XX X X 0X

F=Female
 M=Male
 No.of pins
 20~100P
 Plastic Height
 022=2.2mm
 Contact Plating
 G0:Gold Flash
 G1:3U" Gold
 G2:5U" Gold
 G3:10U" Gold
 G4:15U" Gold
 G5:30U" Gold
 S0:Gold Flash/Tin
 Insulator Material Option
 D=PA46
 F=LCP
 Packing
 T:Tube
 R:Reel

OPERATION		DRAW	Jelly Feng	2022.10.22	SCALE	FIT
X.X	±0.30					
X.XX	±0.20	CHECK			UNIT	mm
X.XXX	±0.10					
Angle	±3°	APPROVE			SIZE	A4
DIM	TOL					
					SHEET	1/1
					PROJ.	◆

JILN® 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONICS CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A1	2022.9.6	修订PCB封装参考尺寸	ChenWei
A0	2019.11.15	NEW DRAWING	ChenWei

PART NO. 3720MXXX022XXXX0X
 TITLE: 0.5BTB-NPIN H=2.2公座无柱无定位片