HSF RoHS

SPECIFICATIONS
Rated Current:3.0AMP
Contact Resistance:30mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c

Contact Material:Phosphor Bronze
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Resistance To Soldering Heat:
245° C±5° C, 10s(PBT insulator)

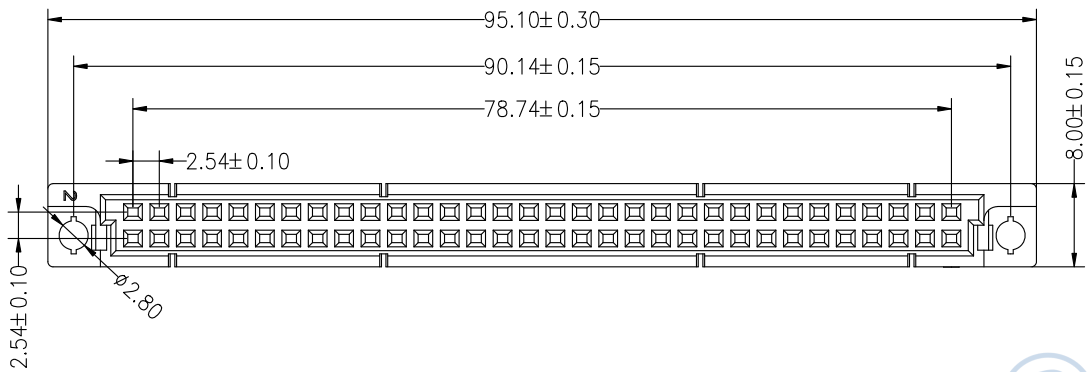



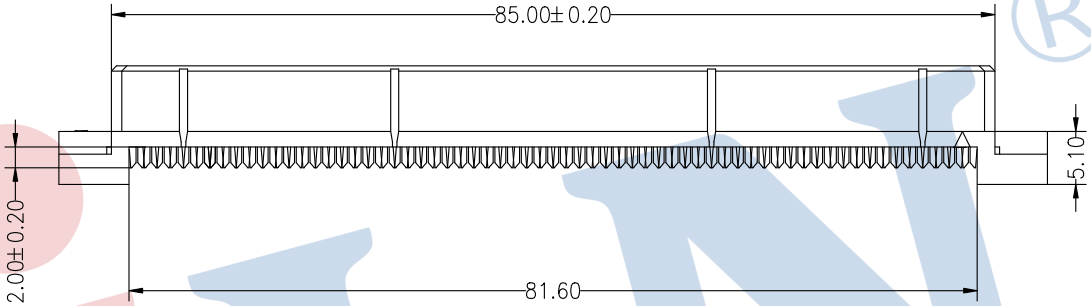





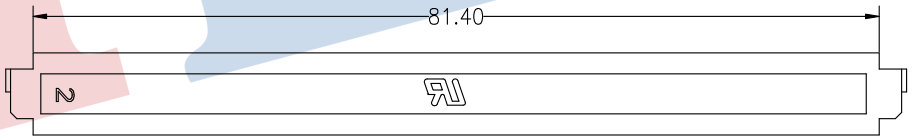

Ordering Information

3512 2 64 B F I XX P W A X

- 64 — No.of Pins 64=64Pin
- XX — Contact Plating NI:NI SO:Gold Flash/Ni
- X — Stream Code

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2023.03.23	NEW DRAWING	

OPERATION				
DRAW	RICH LIN	23.03.23	X.X	±0.30
CHECK			X.XX	±0.20
			X.XXX	±0.10
APPROVE			Angle	±3°
			DIM	TOL

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

JILN® 深圳市锦凌电子有限公司
SHENZHEN JINLING ELECTRONICS CO.,LTD
Tel：86-755-27483253 Fax：86-755-2997-5588

PART NO.	3512264BFIXXPWAX
TITLE:	Din41612 264 Female IDC-Type