




SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:30mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c

Contact Material:Copper Alloy
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Resistance To Soldering Heat:
 245°C±5°C For 5~ 10 Second(PBT insulator)

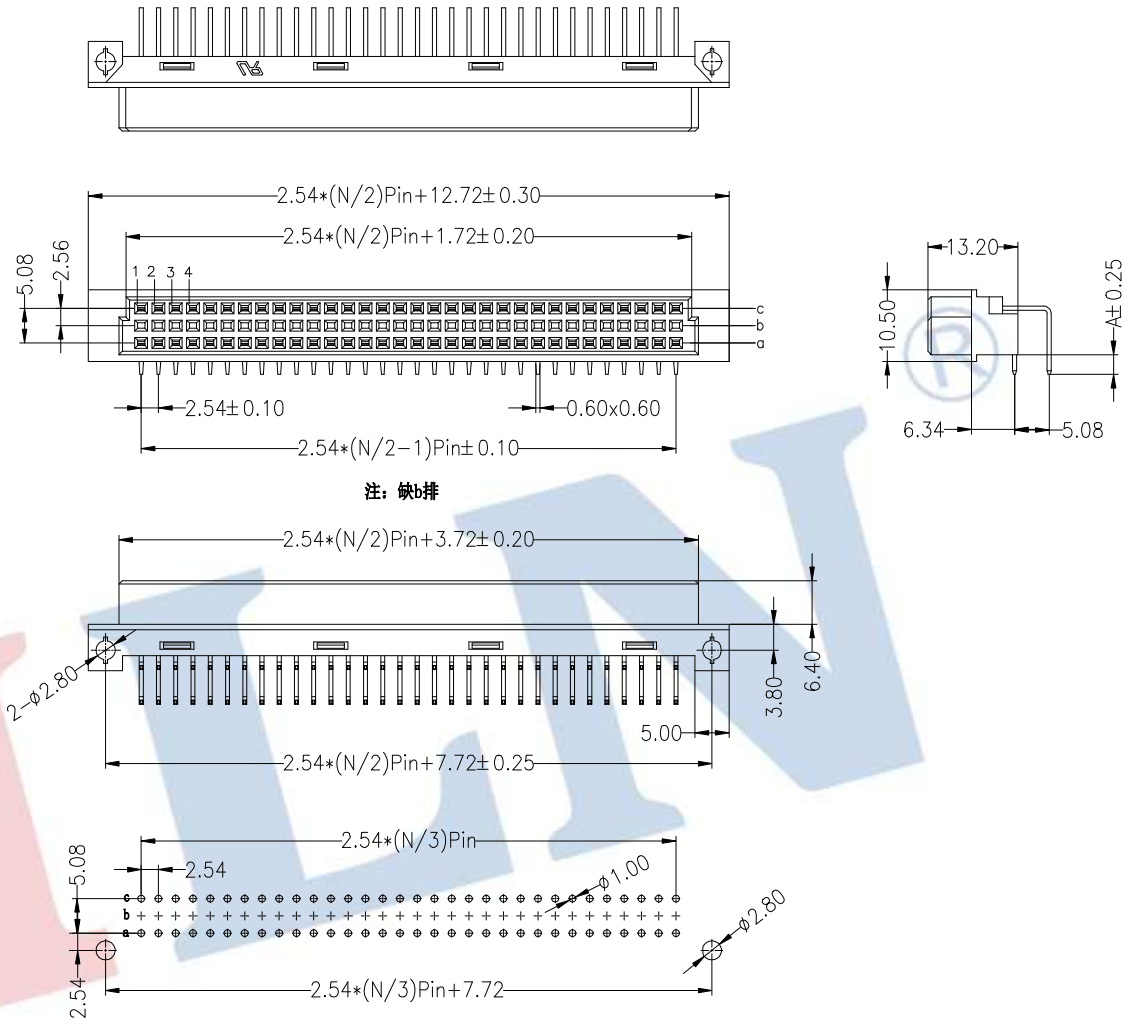

注: 缺b排

Ordering Information

35113 XX C F R XX X N A X

- No. of Pins: NPin (N=20, 32, 36, 64)
- Contact Type: F=Female
- Contact Plating: G0:Gold Flash, S0:Gold Flash/Tin, S1:3U" Gold/Tin, S2:5U" Gold/Tin, S3:10U" Gold/Tin, S4:15U" Gold/Tin, S5:30U" Gold/Tin
- Contact Material: B=Brass, P=Phosphor Bronze
- Stream Code

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

Dimension antitheses list	
ITEM	A
Standard	2.90

				OPERATION		DRAW	Jelly Feng	2023.03.29	SCALE	FIT	JILN ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel : 86-755-27483253 Fax: 86-755-2997-5588	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK			SIZE	A4	PART NO.	35113XXCFRXXXNAX
				X.XXX	±0.10				SHEET	1/1		
A0	2023.03.29	NEW DRAWING		Angle	±3°	APPROVE			PROJ.	TITLE:	欧式插座 母座 90度 无鱼叉 缺b排 成品系列图	
REV	DATE	MODIFICATION DESCRIPTION		DIM	TOL							
1	2	3	4	5	6	7	8	9				