

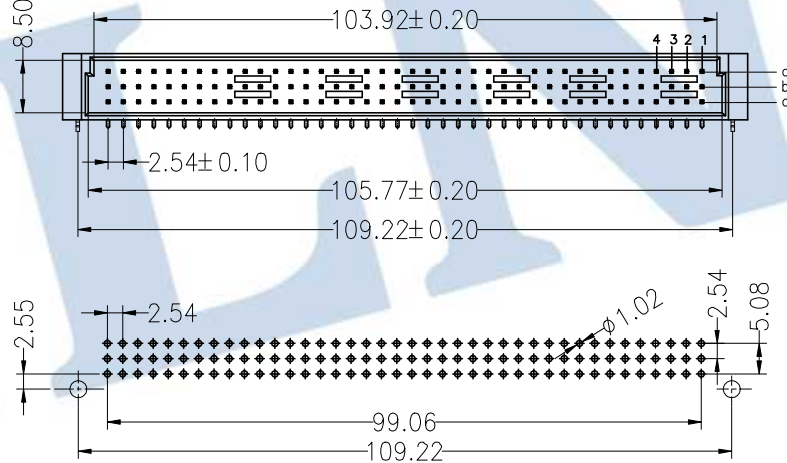


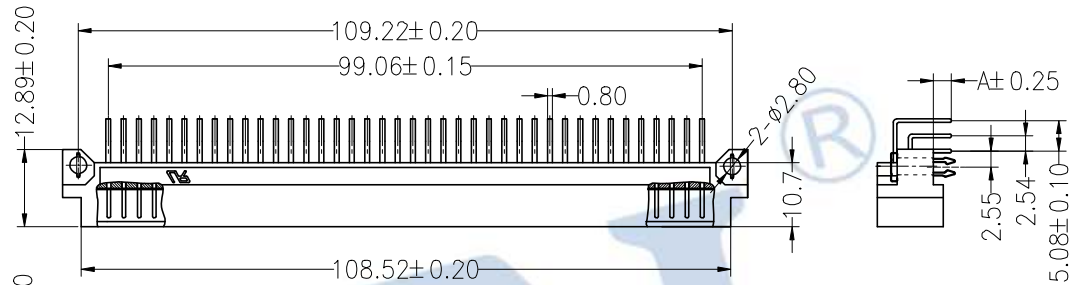

**SPECIFICATIONS**

Rated Current:3.0AMP  
 Contact Resistance:30mΩ Max  
 Withstand Voltage:1000V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°c to +105°c

Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Resistance To Soldering Heat:  
 245° C±5° C For 5~10 Second(PBT insulator)

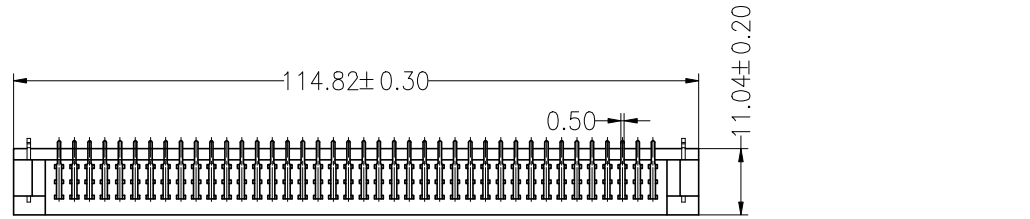

**Ordering Information**

**3511 3 120 A M R XX B W A X**

No.of Pins NPin N=120	Contact Type M=Male	Contact Plating G0:Gold Flash S0:Gold Flash/Tin S1:3U" Gold/Tin S2:5U" Gold/Tin S3:10U" Gold/Tin S4:15U" Gold/Tin S5:30U" Gold/Tin	Contact Material B=Brass	Stream Code
-----------------------------	------------------------	---	-----------------------------	-------------

Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

Dimension antitheses list	
ITEM	A
Standard	3.00

				OPERATION		DRAW	Jelly Feng	2023.03.29	SCALE	FIT	<b>JILN</b> ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5588	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK	SIZE	A4				
				X.XXX	±0.10	APPROVE	SHEET	1/1				
A0	2023.03.29	NEW DRAWING		Angle	±3°			PROJ.		PART NO.	35113120AMRXXBWAX	
REV	DATE	MODIFICATION DESCRIPTION		DIM	TOL					TITLE:	欧式插座 公座 90度 带鱼叉 成品系列图	
1	2	3	4	5	6	7	8	9				