



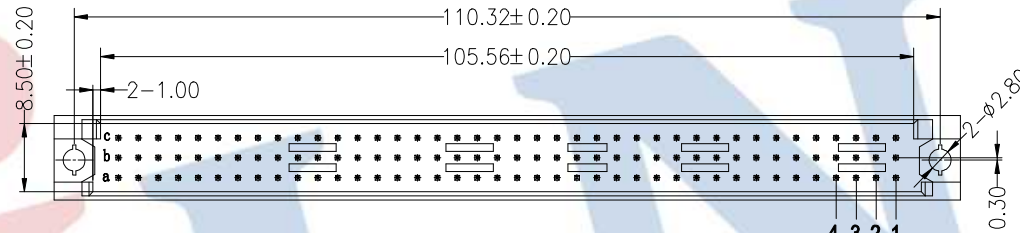

**SPECIFICATIONS**

Rated Current:3.0AMP  
 Contact Resistance:30mΩ Max  
 Withstand Voltage:1000V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°c to +105°c

Contact Material:Copper Alloy  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Resistance To Soldering Heat:  
 245°C±5°C For 5 Second(PBT insulator)

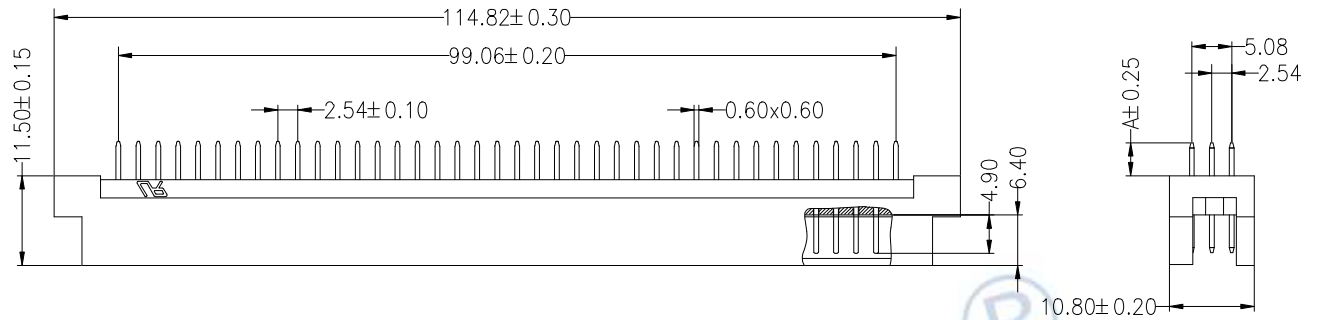

**Ordering Information**

**3511 3 120 A M S XX B N A X**


No.of Pins  
 NPin  
 N=120

Contact Type  
 M=Male

Contact Plating  
 G0:Gold Flash  
 S0:Gold Flash/Tin  
 S1:3U" Gold/Tin  
 S2:5U" Gold/Tin  
 S3:10U" Gold/Tin  
 S4:15U" Gold/Tin  
 S5:30U" Gold/Tin

Contact Material  
 B=Brass

Stream Code

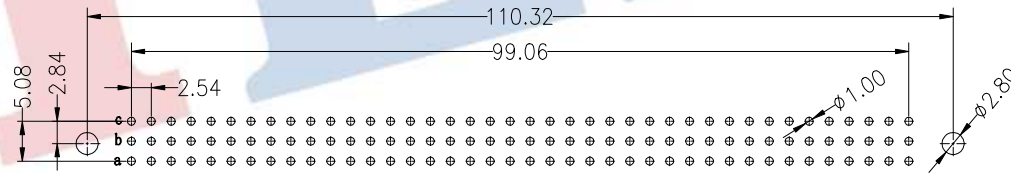

Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE± 0.05)

Dimension antitheses list	
ITEM	A
Standard	4.00

A	AO	2023.03.29	NEW DRAWING	CHANGE	OPERATION	DRAW	Jelly Feng	2023.03.29	SCALE	FIT	<b>JILN</b> ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel : 86-755-27483253 Fax: 86-755-2997-5588
	REV	DATE	MODIFICATION DESCRIPTION		X.X ±0.30	CHECK			UNIT	mm	
					X.XX ±0.20				SIZE	A4	
					X.XXX ±0.10	APPROVE			SHEET	1/1	
				Angle ±3°				PROJ.		PART NO.	35113120AMSXXBNAX
				DIM TOL						TITLE:	欧式插座 公座 180度 无鱼叉 成品系列图