

HSF RoHS

SPECIFICATIONS






Rated Current:5.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Resistance To Soldering Heat:
 245°C±5°C For 5~10 Second(PBT insulator)

Ordering Information

35164 128 A M S XX B N A X

No.of Pins: 128P转64P
 Contact Type: M:Male
 Contact Plating: G0: Au2u"
 Stream Code

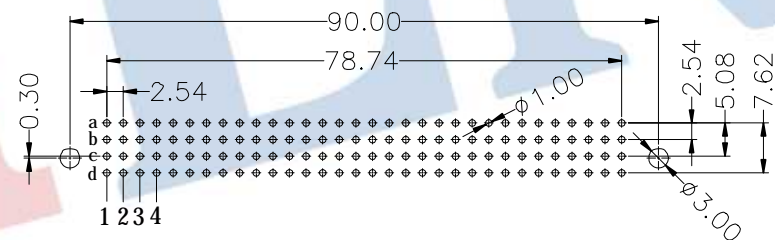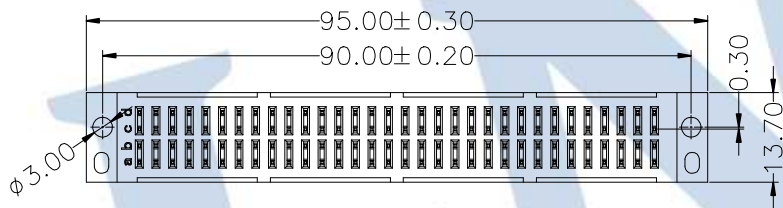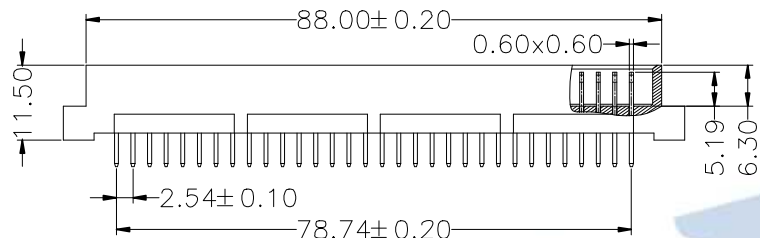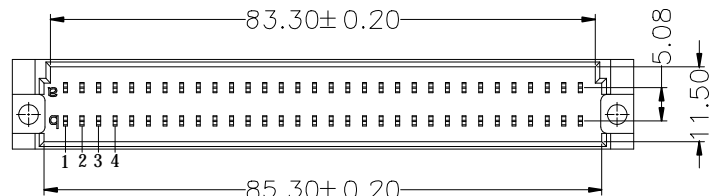

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

				OPERATION		DRAW	Jelly Feng	2023.03.29	SCALE	FIT	JILN ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5588	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK		SIZE	A4	PART NO.		35164128AMSXXBNAX
				X.XXX	±0.10					SHEET	1/1	
A0	2023.03.29	NEW DRAWING		Angle	±3°	APPROVE		PROJ.		TITLE:		欧式插座 公座 180度 128Pin转64Pin
REV	DATE	MODIFICATION DESCRIPTION		DIM	TOL							
1	2	3	4	5	6	7	8	9				