
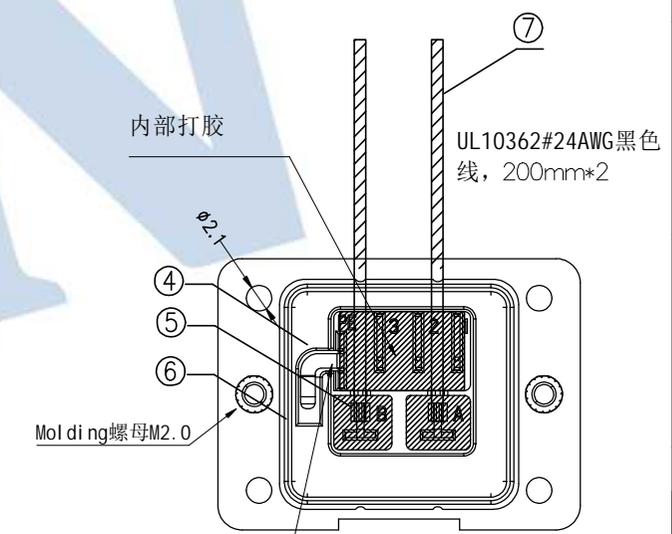
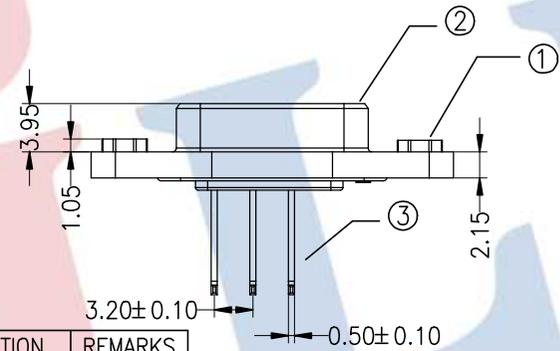

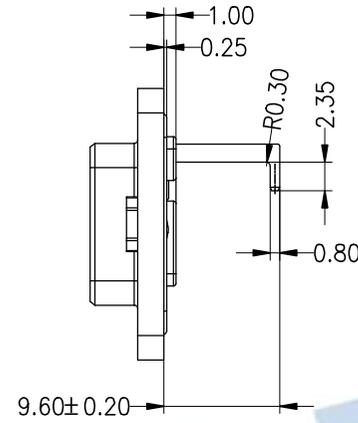


# HSF RoHS

Note:  
 Current Rating: POWER CONTACT 7A max.  
 BRAKE CONTACT 1A max.  
 Voltage Rating: POWER CONTACT 200 VAC.  
 BRAKE CONTACT 100 VAC.  
 Insulation Resistance:>1000 MΩ at  
 @500VDC  
 Withstand Voltage:1500VAC for 1 minute  
 Contact Resistance: 10 mΩ MAX  
 Operation Temperature:-40°C to +125°C  
 Solder Temperature:260°C±5° 5S  
 Brake contact:AWG#24 to AWG#22  
 Coated outer dia:1.1 to 1.4 dia

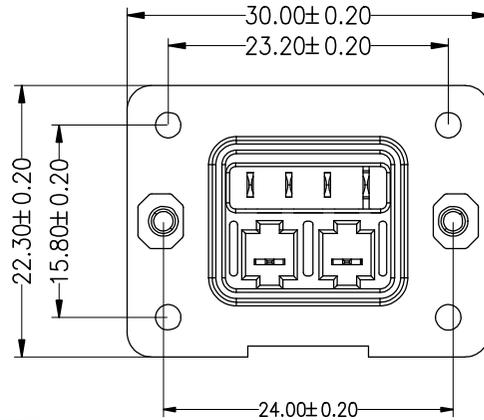

NO	NAME	Q'TY	MATERIAL	DESCRIPTION	REMARKS
1	NUT	2	COPPER ALLOY	NATURAL COLOR	M2*0.4
2	HOUSING	1	Synthetic Resin UL94V-0	BLACK	
3	POWER CONTACT	3	COPPER ALLOY	PLATING GOLD	
4	GROUND CONTACT	1	COPPER ALLOY	PLATING GOLD	
5	BRAKE CONTACT	2	COPPER ALLOY	PLATING GOLD	
6	SOCKET SEALING	1	SYNTHETIC RUBBER	YELLOW	
7	WIRE ROD	2	UL10362#24AWG	BLACK	

\*注意此处缺口位置不可有胶溢出\*

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	Tim Chu	2022.6.22	SCALE	FIT	JILN® 深圳市锦凌电子有限公司	
				DIM	TOL						SHENZHEN JINLING ELECTRONICS CO.,LTD	
A0	2021.09.20	NEW DRAWING		X.X	±0.30				UNIT	mm	Tel: 86-755-27483253 Fax: 86-755-2997-5992	
				X.XX	±0.20	CHECK	Ou Yang Hui	2022.6.22	SIZE	A4	PART NO.	6353-06BS1WA03
				X.XXX	±0.10				SHEET	1/2	TITLE:	伺服电动机动力勾板型底座4+2Pi n连接器 型/带刹车线
				Angle	±3°	APPROVE	Wang Wei	2022.6.22	PROJ.	◆		